


# VALUE Cat.8 (Class I) Field Connector Plug RJ45, Tool-Free

<b>Product No.</b>	21.99.1804
<b>Manufacturer</b>	VALUE
<b>Manufacturer No.</b>	21.99.1804
<b>EAN (single piece)</b>	7630049627567

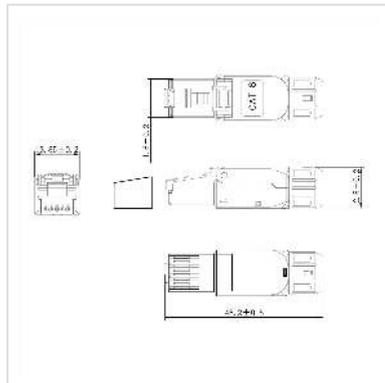

**8-wire RJ45 Cat.8 (Class I) field connector plug for an easy, fast and reliable assembly without special tools.**

- Full shielded with zinc alloy housing
- T568A & T568B wiring
- Cat. 8 channel performance verified
- Solid: 1/22AWG(0.65MM)-1/26AWG(0.4MM)
- Stranded: 7/22AWG-7/26AWG
- For cables with outer diameters of 5.0 to 8.5mm
- Suitable for PoE+ (IEEE 802.3at) applications
- Easy, quick and reliable installation, no special tool required
- The ring ensures 360° forwarding of the shielding of the cable to the shielding of the plug

For a Cat.8 channel link S/FTP Cabling we recommend to use the following components:

21.99.1800 VALUE S/FTP Cable, Cat.8, Solid Wire, AWG22

21.99.1807 VALUE Cat.8 RJ45 Keystone, Jack, toolless

21.99.1804 VALUE Cat.8 Shielded Field Connector RJ45 plug

21.99.1801 to 21.99.1803 VALUE S/FTP Patch Cable Stranded Cat.8, grey (1m to 3m)

## Technical specifications

Manufacturer VALUE

Product group Connection technology TP

Product type	Connectors RJ-45
Colour	silver
Shield type	Screened
Transfer quality	Cat8.1 / Class I
Quantity of ports	1
Material (casing)	Zinc alloy
separate strain relief	yes
Dimensions (HxWxD)	13 mm x 14 mm x 48 mm
Operating temperature min.	-10 °C
Operating temperature max.	60 °C
Height	13 mm
Width	14 mm
Depth	48 mm
Weight	19 g
Height of packaging (single piece)	10 mm
Width of packaging (single piece)	30 mm
Depth of packaging (single piece)	20 mm
Package weight (single piece)	0.025 kg