



Datenblatt - Fiche technique - Data sheet

11.03.1588



ROLINE Mini SAS - Anschlusskabel, 1,5m




ROLINE Câble Mini SAS, 1,5 m

ROLINE External Mini SAS Cable, 1.5 m, black


REV.	DESCRIPTION	MDF'D	APP'D	DATE
06	MODIFY BACKSHELL DIM	Jin	James	08/30/2009
07	REVISED DRAWING FORMAT	Jin	James	02/23/2010
08	CHANGE RAW CABLE	Jin	James	12/30/2010

WIRING TABLE

P1				P2			
GROUND	A1	—	—	B1	GROUND		
RX0+	A2	←	—	B2	TX0+		
RX0-	A3	←	—	B3	TX0-		
GROUND	A4	—	—	B4	GROUND		
RX1+	A5	←	—	B5	TX1+		
RX1-	A6	←	—	B6	TX1-		
GROUND	A7	—	—	B7	GROUND		
RX2+	A8	←	—	B8	TX2+		
RX2-	A9	←	—	B9	TX2-		
GROUND	A10	—	—	B10	GROUND		
RX3+	A11	←	—	B11	TX3+		
RX3-	A12	←	—	B12	TX3-		
GROUND	A13	—	—	B13	GROUND		
GROUND	B13	—	—	A13	GROUND		
Tx3-	B12	→	—	A12	RX3-		
TX3+	B11	→	—	A11	RX3+		
GROUND	B10	—	—	A10	GROUND		
TX2-	B9	→	—	A9	RX2-		
TX2+	B8	→	—	A8	RX2+		
GROUND	B7	—	—	A7	GROUND		
TX1-	B6	→	—	A6	RX1-		
TX1+	B5	→	—	A5	RX1+		
GROUND	B4	—	—	A4	GROUND		
TX0-	B3	→	—	A3	RX0-		
TX0+	B2	→	—	A2	RX0+		
GROUND	B1	—	—	A1	GROUND		
CHASSIS GROUND				CHASSIS GROUND			

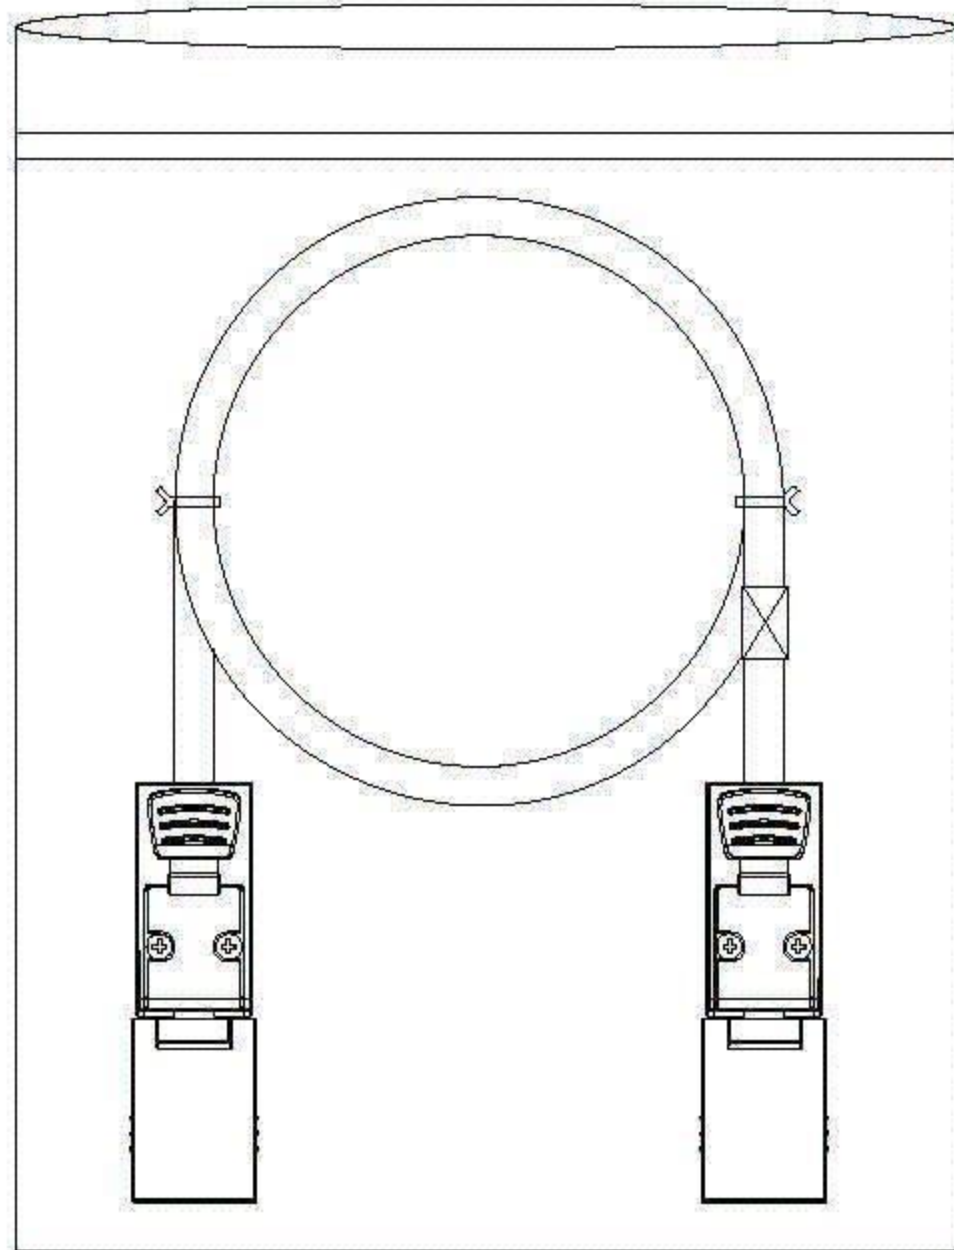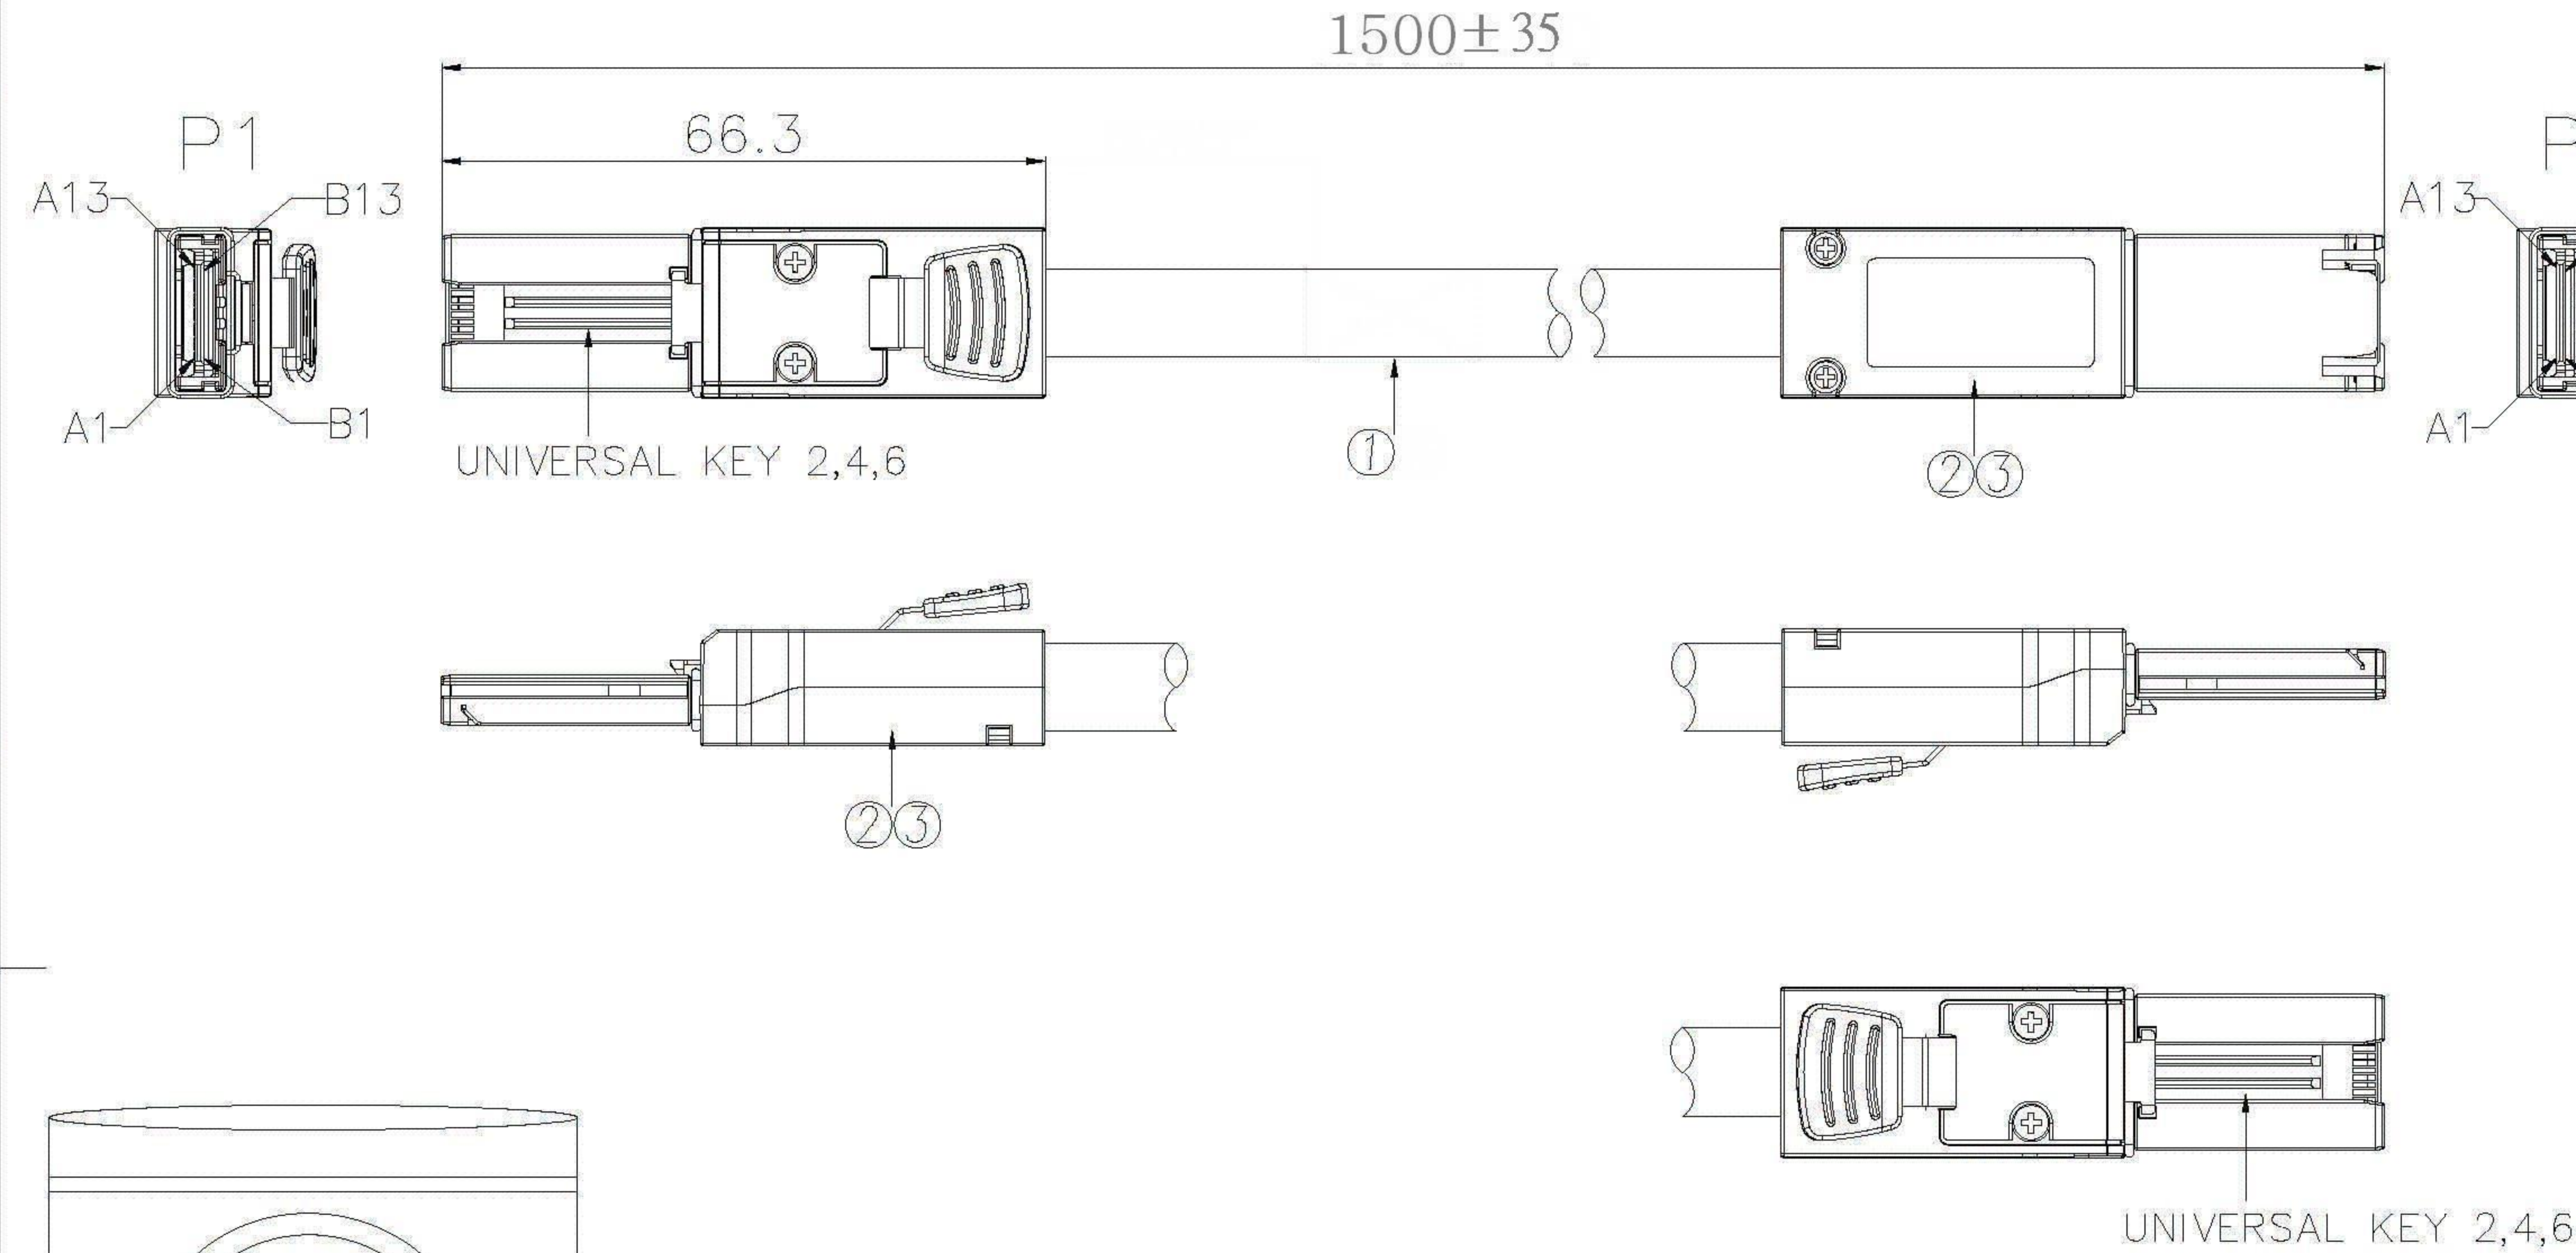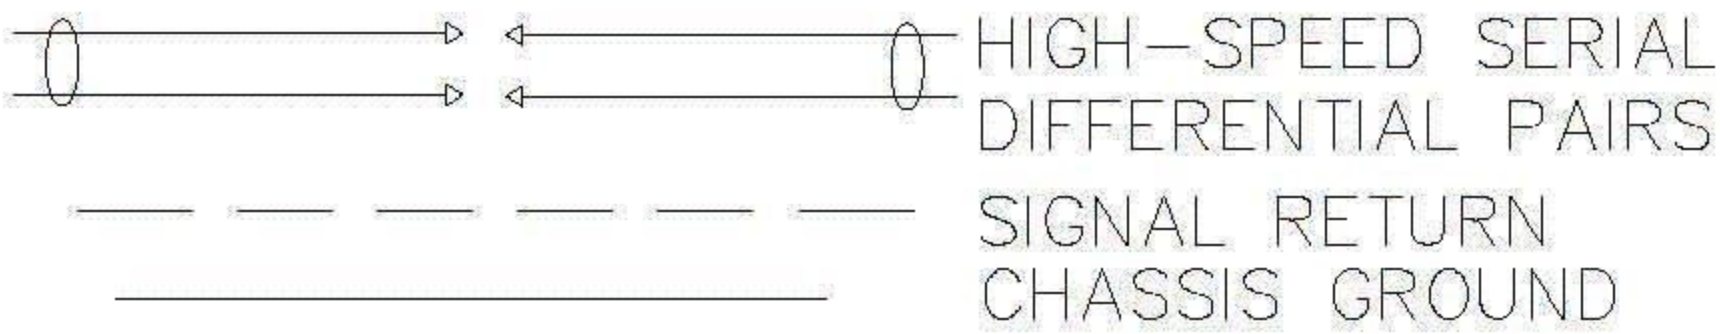

PACKAGE

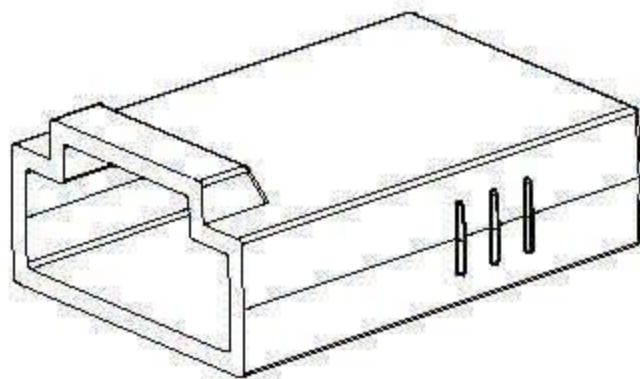

DUST COVER

NOTE:
1.PE BAG SIZE:L300 X W230mm

9					
8					
7					
6					
5					
4					
3	SFF 8088 26PIN UNIVERSAL KEY (2,4,6) COVER KIT W/BLOCK LATCH			1	
2	SFF 8088 26PIN CABLE END CONNECTOR (30u")			2	
1	TWIN-AX CABLE (28AWG x 8PAIR),100ohm, BLACK, UL APPROVED			A/R	
ITEM	DESCRIPTION			Q'TY	


RoHS COMPLIANT

Unit : mm

GENERAL TOLERANCES:
(UNLESS SPECIFIED)

0 = ±.45
0.0 = ±.30
0.00 = ±.20
0.000 = ±.10
0" = ± 2"
0.0" = ± 1"

PROJECTION



D.R.	Jin	12/30/2010
CH.K	Sung	12/30/2010
APV.D	James	12/30/2010

Rotronic Co., Ltd.

ROLINE External Mini SAS Cable, 1.5m, black

SCALE	SIZE	Item No.: 11.03.1588
N/A	A3	

PRODUCT NO. OR LAYOUT	REV. 08
	SH,T NO. 1 OF 1