



Datenblatt - Fiche technique - Data sheet


11.04.5860



ROLINE Monitorkabel DVI, ST-ST, (24+1) dual link, schwarz / silber, 1,0 m

ROLINE Câble pour écran DVI, M-M, (24+1) dual link, noir/argent, 1,0 m


ROLINE Monitor Cable, DVI (24+1), Dual Link, M/M, black /silver, 1.0 m

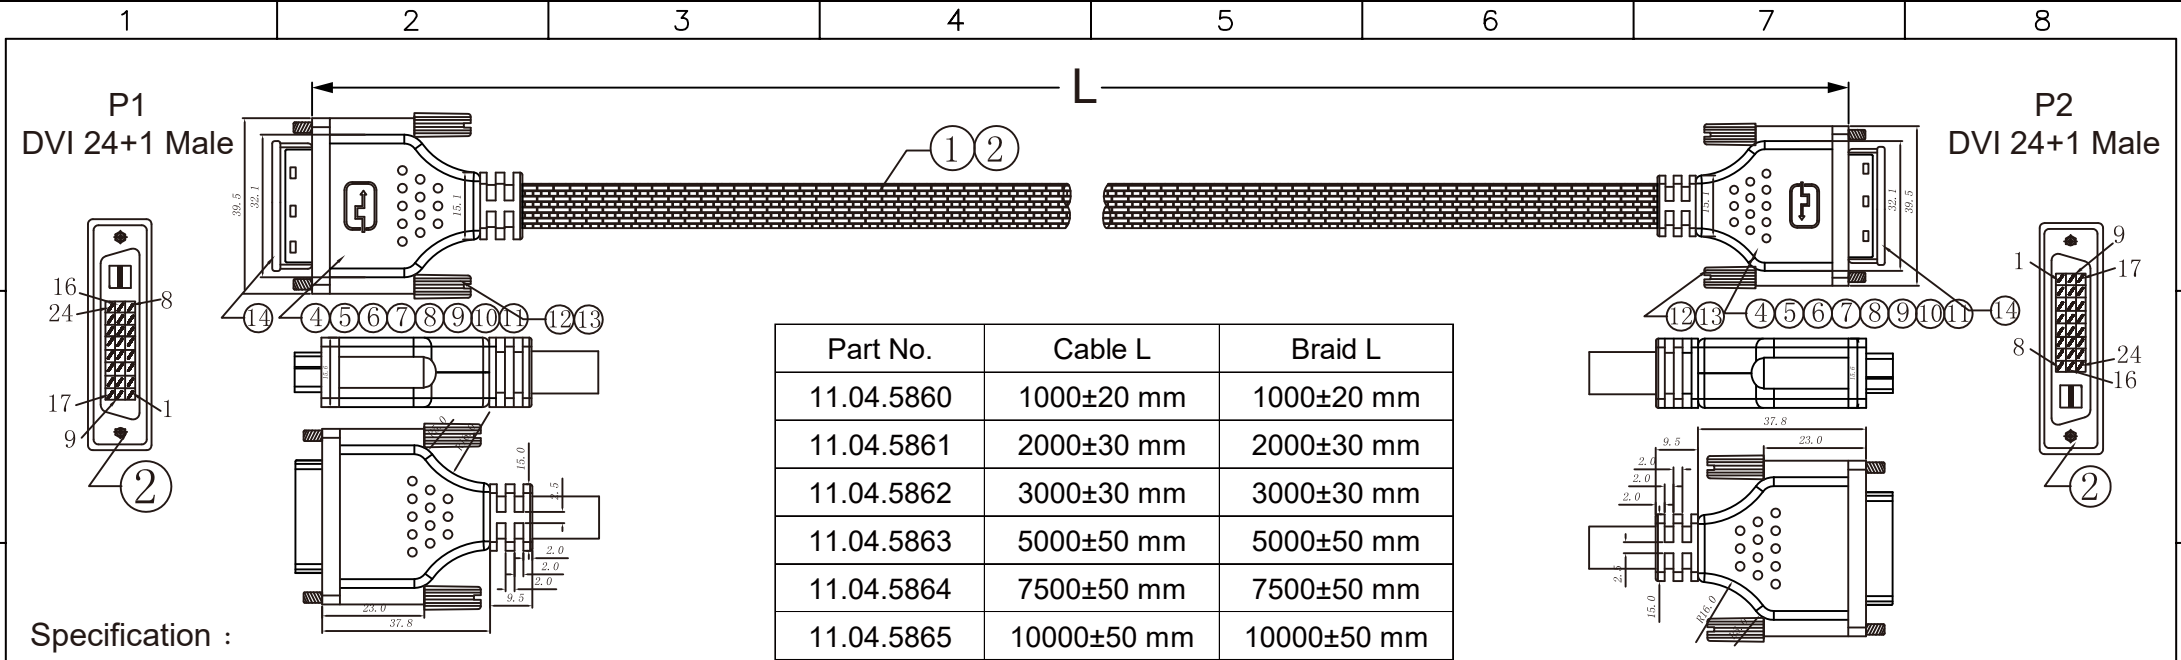

Specification :

- 1 Cable UL20276, (1P*30AWG+D+AL+MYLAR)*7C+IP*30AWG+3C*30AWG+AL+D+B, OD: 8.6 mm, Jacket: Black, Printing: E11 9932-T AWM 20276 80°C 30V VW-1 COPARTNER DVI DIGITAL DUAL LINK RoHS
- 2 Braid Black Cotton RoHS
- 3 Connector DVI(24+1)M, Insulator: Black, Iron Shell: Gold Plated 1u", Pin: Gold Plated 1u", RoHS
- 4 Solder Lead-Free Tin Line, OD: 0.8 mm, 1000G, RoHS
- 5 Tube 1 Black Tube OD: 0.8mm RoHS
- 6 Tube 2 Black Tube OD: 2.5mm RoHS
- 7 Inner Molding LP- PE 950 RoHS
- 8 Tape High Temperature Resistant, 1.8CM RoHS
- 9 Copper Foil 2.2CM RoHS
- 10 Outer Molding PVC: 45P, Black RoHS
- 11 Metal Shell DVI, Dark Gray, Metal Shell, RoHS
- 12 Screw 2.8*44.2, RoHS
- 13 Screw PVC PVC: 25P, Black, RoHS
- 14 Dust Cover DVI M, Dust Cover, RoHS

Pin Assignment

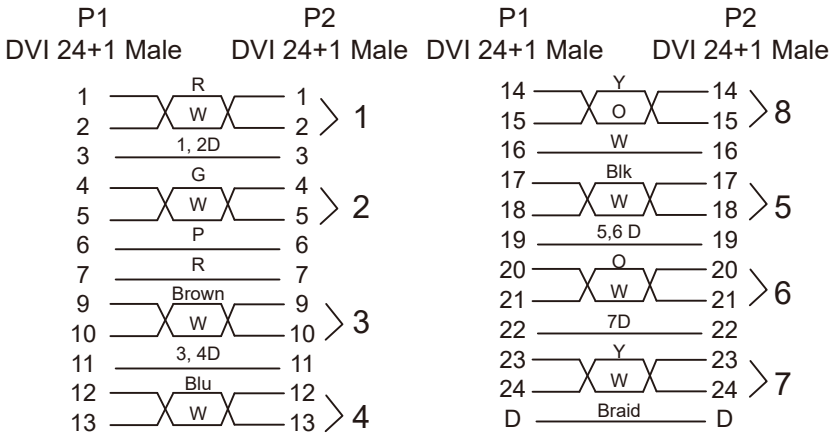

Rev.	Date	Contents of Change	Designer	Tol± Range					V				Approve	Check	Draw	Design	Product Name	ROLINE SILVER DVI Cable, DVI-D(24+1) Dual Link, M/M					
					Pla	Met	Ins	Por	Cab	Pac	Gas	Dis					Drawing Date				Product No.		
①				0~6	0.1	0.1	0.1	0.2	0.5	1	0.5	0.2	Allen	Allen		Philip	2017/3/27	Product No.	11.04.5860/11.04.5861/11.04.5862/ 11.04.5863/11.04.5864/11.04.5865		R00		
②				6~30	0.1	0.1	.15	.25	1	1	0.5	.25											
③				30~80	0.1	.15	0.2	0.3	2	1.5	1	0.3											
④				80~180	.15	.15	.25	0.3	2	2	1	.45					SECOMP						
⑤				180~315	.15	0.2	0.3	0.4	2.5	2	1	0.6											
⑥				315~800	0.2	0.3	0.4	0.5	3	3	2	1.1			Scale	1 : 1					Unit	mm	

