



Datenblatt - Fiche technique - Data sheet


11.99.9051



VALUE USB 3.1 Kabel, mit PD (Power Delivery), Emark, C-C, ST/ST, weiss, 1,0 m

VALUE Câble USB 3.1, avec PD (Power Delivery), avec Emark, C-C, M/M, blanc,
1,0 m

VALUE USB 3.1 Cable, PD (Power Delivery) 20V5A, with Emark, C-C, M/M,
white, 1.0 m

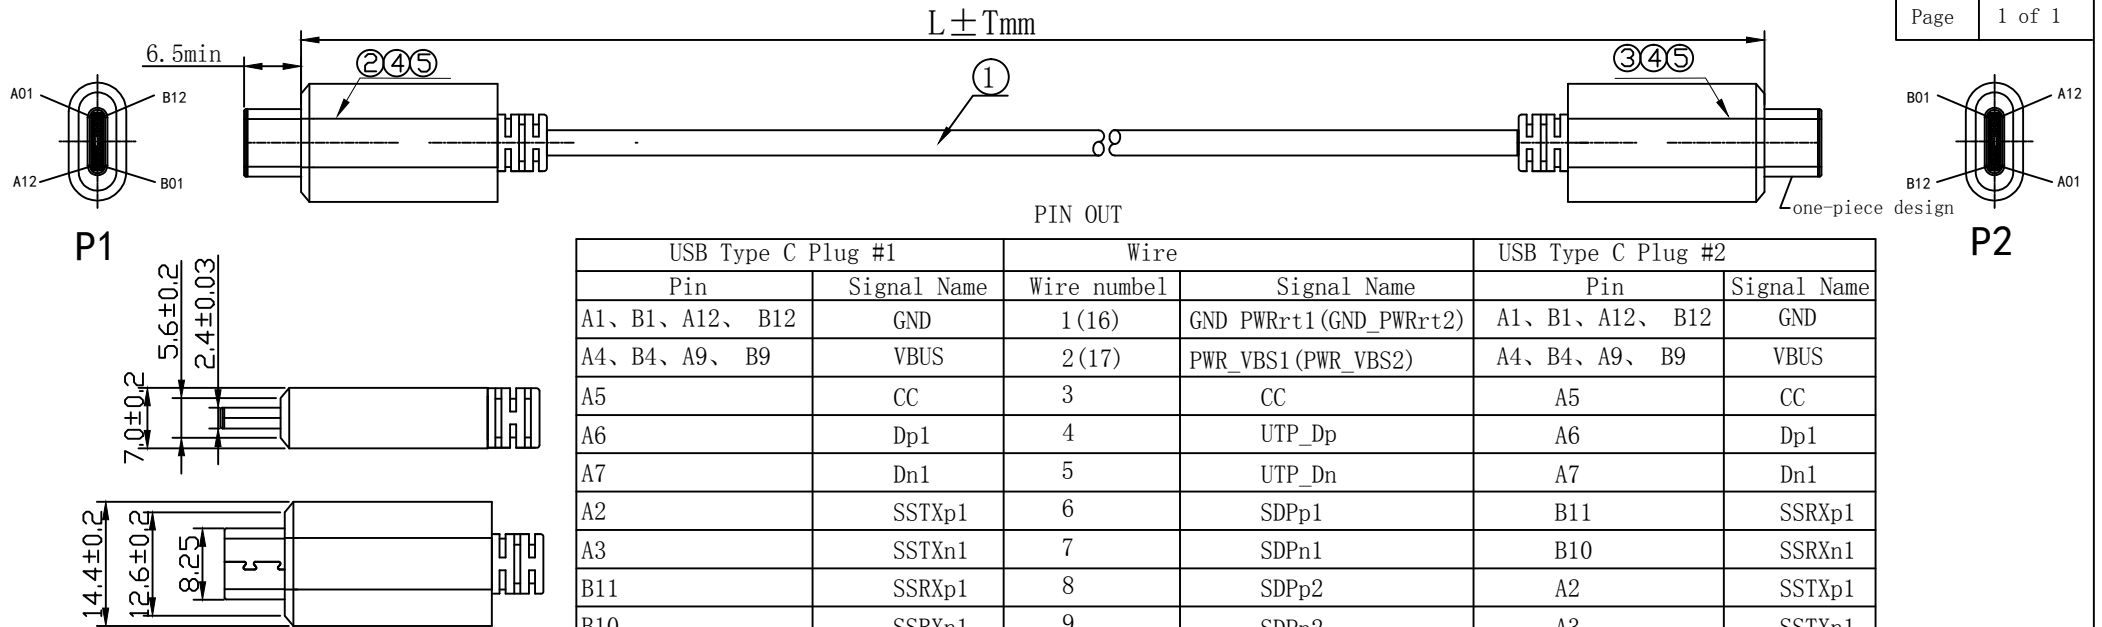

NOTE:

- 100% open short & miss wire test;
- ROHS 2.0 AND REACH COMPLIANT
- PRINTING:EXXXXXX RL AWM STYLE 2725 80℃ 30V VW-1 SUPER HIGH SPEED USB Revision 3.1 PAK HENG

MATERIAL LIST:

⑤	OUTER MOLD	PVC color For white	2	
④	INNER MOLD	LD-PE	2	
③	USB C TYPE 2	USB C/M Solder Type,Black PBT Insulation,The Pin Gold Plating, the shell for Nickel Plating	1	
②	USB C TYPE 1	USB C/M Solder Type,Black PBT Insulation,The Pin Gold Plating, the shell for Nickel Plating	1	
①	CABLE	USB 3.1 CABLE 30AWG TC*8C0AX+22AWG TC*2C+30AWG TC*1P+32AWG TC*4C+F +AB +PVC/WHITE OD:5.0±0.2mm	1	

NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		NEW	2016.05.19	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

ITEM NO.	LENGTH	COLOUR	Emark	Current	Data
11.99.9050	500±20MM	WHITE	W/Emark	Max 5A	Max 10Gbps
11.99.9051	1000±20MM	WHITE	W/Emark	Max 5A	Max 10Gbps

DESC. VALUE USB 3.1 GEN 2 CM/CM CABLE

SECOMP