



Datenblatt - Fiche technique - Data sheet



**14.01.3435**



ROLINE HDMI 4K2K Kabel mit Repeater, 25,0 m

ROLINE Câble HDMI 4K2K avec Ethernet, avec repeater, M/M, 25,0 m

ROLINE HDMI 4K2K Active Cable, M/M, 25.0 m

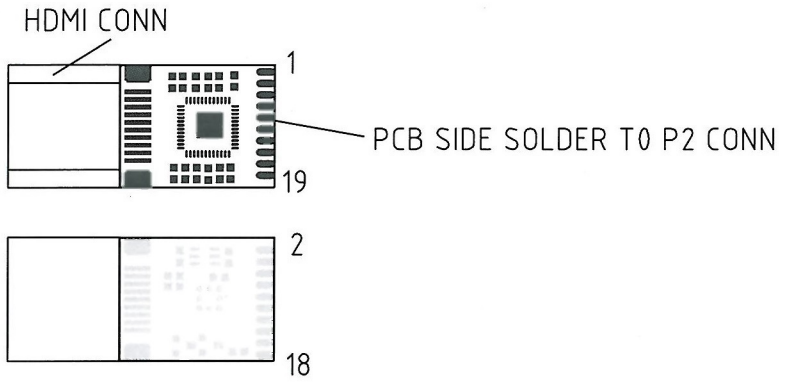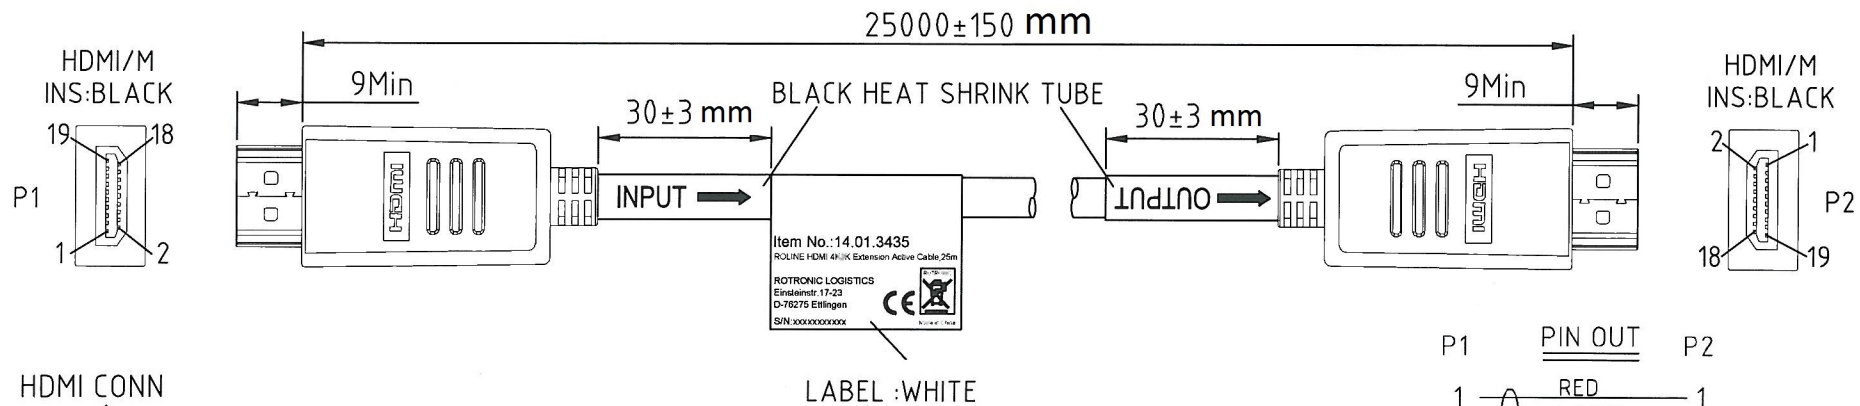

P1	PIN OUT	P2
1	RED	1
3	WHITE	3
2	DRAIN	2
4	BULE	4
6	WHITE	6
5	DRAIN	5
7	GREEN	7
9	WHITE	9
8	DRAIN	8
10	BROWN	10
12	WHITE	12
11	DRAIN	11
14	BLACK	14
19	WHITE	19
17	DRAIN	17
13	GREEN	13
15	ORANGE	15
16	PURPLE	16
18	RED	18

- NOTE:
- CABLE:UL 20276 [26AWG(1/0.4CCS)×1P INS:FOAM-PE+DRAIN WIRE(1/0.32CCS)+AL/MY+MY]×5C+28AWG(1/0.32CCS)×4C INS:Polyolefin+AL/MY+DRAIN WIRE(1/0.32CCS)+BRAID(85%AL/Mg) PVC JACKET OD:8.0±0.15mm COLOR:BLACK CABLE MUST PRINT: High Speed HDMI™ Cable with Ethernet
  - CONNECTOR:P1&P2:HDMI 19P MALE CONTACT:3u",SHELL:GOLD PLATED
  - HOOD:P1&P2:MOLDED TYPE,PVC 45P,COLOR:BLACK
  - ELECTRICLE TEST:
    - <1>100% OPEN SHORT & MIS WIRE TEST
    - <2>CONTACT RESISTANCE 8 Ohms MAX .
    - <3>INSULATION RESISTANCE 10M Ohms MIN .

Tolerance Inch			M/M			<b>rotronic</b>				
.X	.015	.30								
.XX	.010	.10				Item no.	<b>14.01.3435</b>			
.XXX	.005	.05				Draw	cheng 1/07/15'			
						Desc.	<b>ROLINE HDMI 4K2K Ext. Active Cable 25m, black</b>			
						Scale	NONE	Units	m/m	Third Angle Projection
						Engr	Dwg No. E510-0006		REV: A	Sheet 1