




Datenblatt - Fiche technique - Data sheet

**21.15.9255**

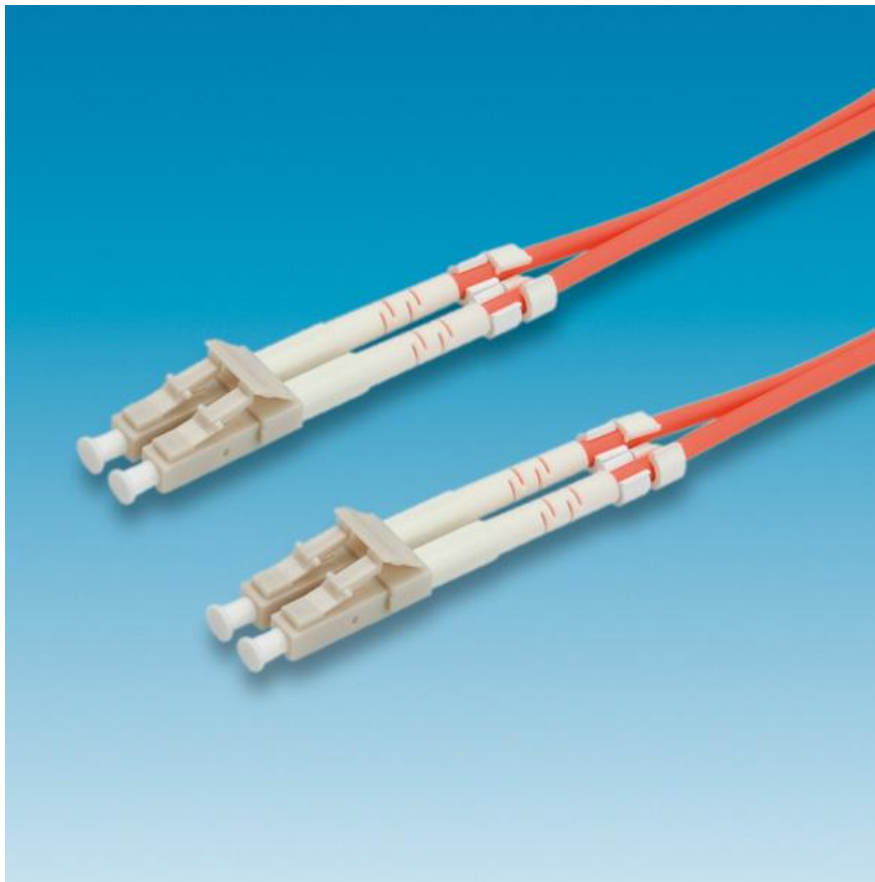

ROLINE LWL-Kabel 62,5/125 $\mu$ m LC/LC, orange, 5m

ROLINE Câble patch FO 62,5/125 $\mu$ m LC/LC, orange, 5m

ROLINE Fibre Optic Jumper Cable 62.5/125 $\mu$ m LC/LC, orange, 5 m


1 2 3 4 5 6

A

A

B

B

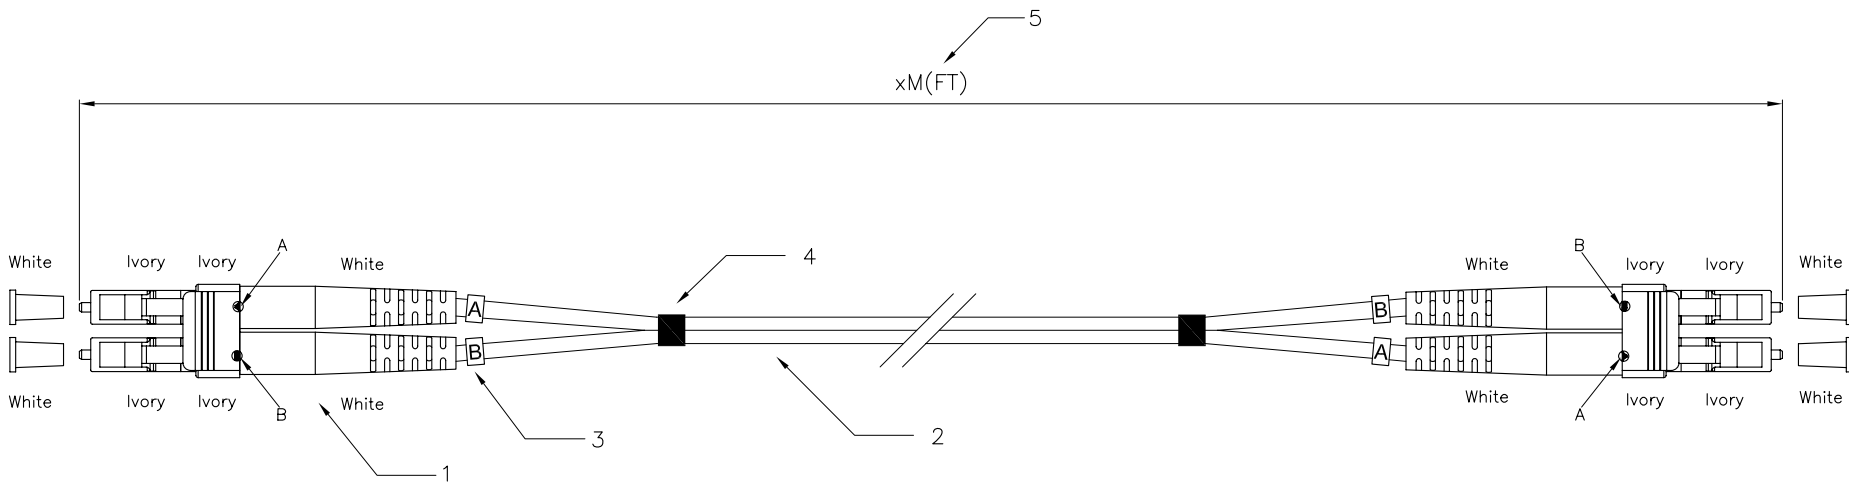

Remack#

Specification:

- 1. Connector Type : LC Multimode
- 2. Cable Type :  
2-1 Zipcord Cable,  $\phi 3.0\text{mm}$ , 62.5/125um Multimode.  
2-2 Cable Jacket : Orange Color, PVC Material.
- 3. Cable Marker
- 4. Shrink Tube
- 5. Length : xM(FT)

21.15.9249	MultiMode, LC-LC,62.5/125 um	0.5M
21.15.9251	MultiMode, LC-LC,62.5/125 um	1M
21.15.9252	MultiMode, LC-LC,62.5/125 um	2M
21.15.9253	MultiMode, LC-LC,62.5/125 um	3M
21.15.9255	MultiMode, LC-LC,62.5/125 um	5M
21.15.9260	MultiMode, LC-LC,62.5/125 um	10M

Performance:

- a. Insertion Loss :  $< 0.5$  dB
- b. Fiber Extention :  $-0.05\mu\text{m} < H < +0.05\mu\text{m}$
- c.  $\phi 1.25\text{mm}$  Ferrule End-face Radius :  $7 < R < 25\text{mm}$
- d. Apex Offset :  $< 50\mu\text{m}$
- e. Increase in insertion loss after 500 mating : 0.2 dB Max
- f. Operating Temperature :  $-20^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$
- g. Storage Temperature :  $-40^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$

C

C

D

GENERAL TOLERANCE OF DIMENSIONS X.XXX $\pm 0.005$ X.XX $\pm 0.05$ X.X $\pm 0.1$	DRAWING	06.JAN.2011	Abby	<b>Rotronic Co.,Ltd.</b>
	CHECK	06.JAN.2011	MAER	
	APPROVAL	06.JAN.2011	YTY	
		DATE	NAME	ITEM NO.: 21.15.XXXX 有吊卡
SCALE	1/1 (A4)	UNIT	mm	DES.: LC to LC Duplex patch cord
	DRAWING NO.	SFBJC093131xxxx36001(SA1)		
	DRAWING CLASSIFICATION	S	SHEET 1 OF 1	

1 2 3 4 5 6

10cm