



Datenblatt - Fiche technique - Data sheet


21.17.0349





ROLINE MPO-Panel 19" für 3 Module

ROLINE Panneau MPO 19" pour 3 modules

ROLINE MPO-Panel 19" for 3 Modules

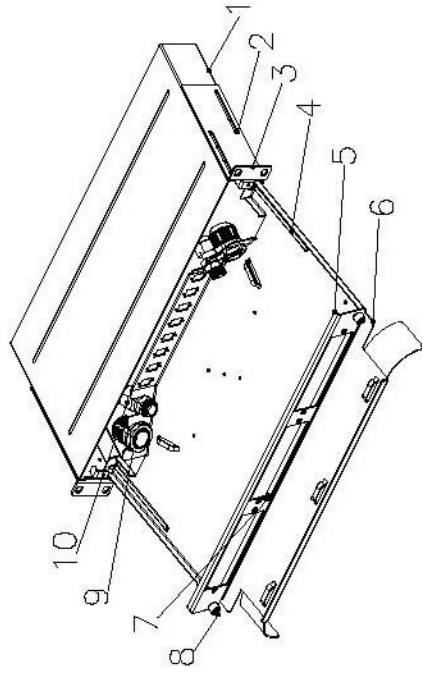

SCALE 1/10

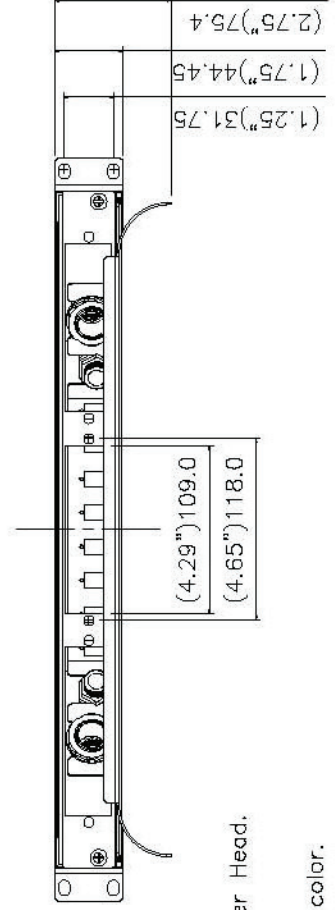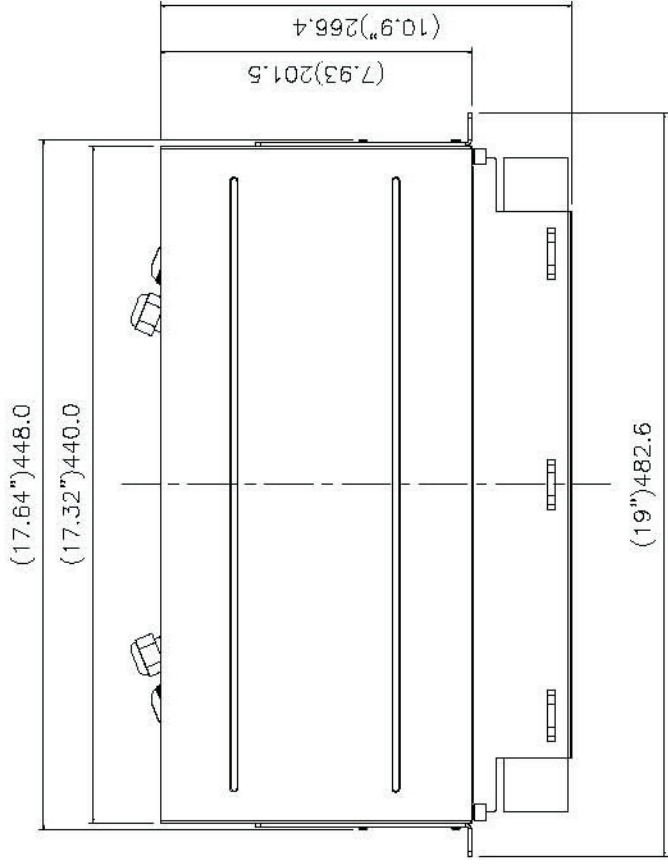


Specification :


Material :

1. Cover : SPCC, 1.2mm Thickness, Black color.
2. Grounding Screw : 4PCS, M3*5mm Zinc Plated, Wafer Head.
3. ledger plate : SPCC, 2.0mm Thickness, Black color.
4. Panel : SPCC, 1.2mm Thickness, Black color.
5. LGX cassette Panel : SPCC, 1.2mm Thickness, Black color.
6. Support bar : SPCC, 1.5mm Thickness, Black color.
7. Mounting Screw : 6PCS, M3*4mm Zinc Plated, Wafer Head.
8. Screw : 2PCS, M3*10.5*13.8mm Zinc Plated, Wafer Head.
9. Cable Glands : AG-25S, NYLON 66, Grey color.
10. Cable Glands : AG-20S, NYLON 66, Grey color.

Performance :

- a. Dimension : 19" x 10.49" x 2.97"
(482.6 x 266.4 x 75.4mm)
- b. Weight : 2.6kg.
- c. Finished: Painted, BK(RAL9005).


GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1		DRAWING	10.APR.2013	LSQ	rotronic		
		CHECK	10.APR.2013	DAY			
		APPROVAL	10.APR.2013	JAIMY			
				DATE	NAME	21.17.0349	
		SCALE	1/5(A4)	ROLINE MPO-PANEL, 19", for 3 Modules, Black			
				DRAWING NO.			
				DRAWING CLASSIFICATION			
			S	SHEET	1	OF 1	

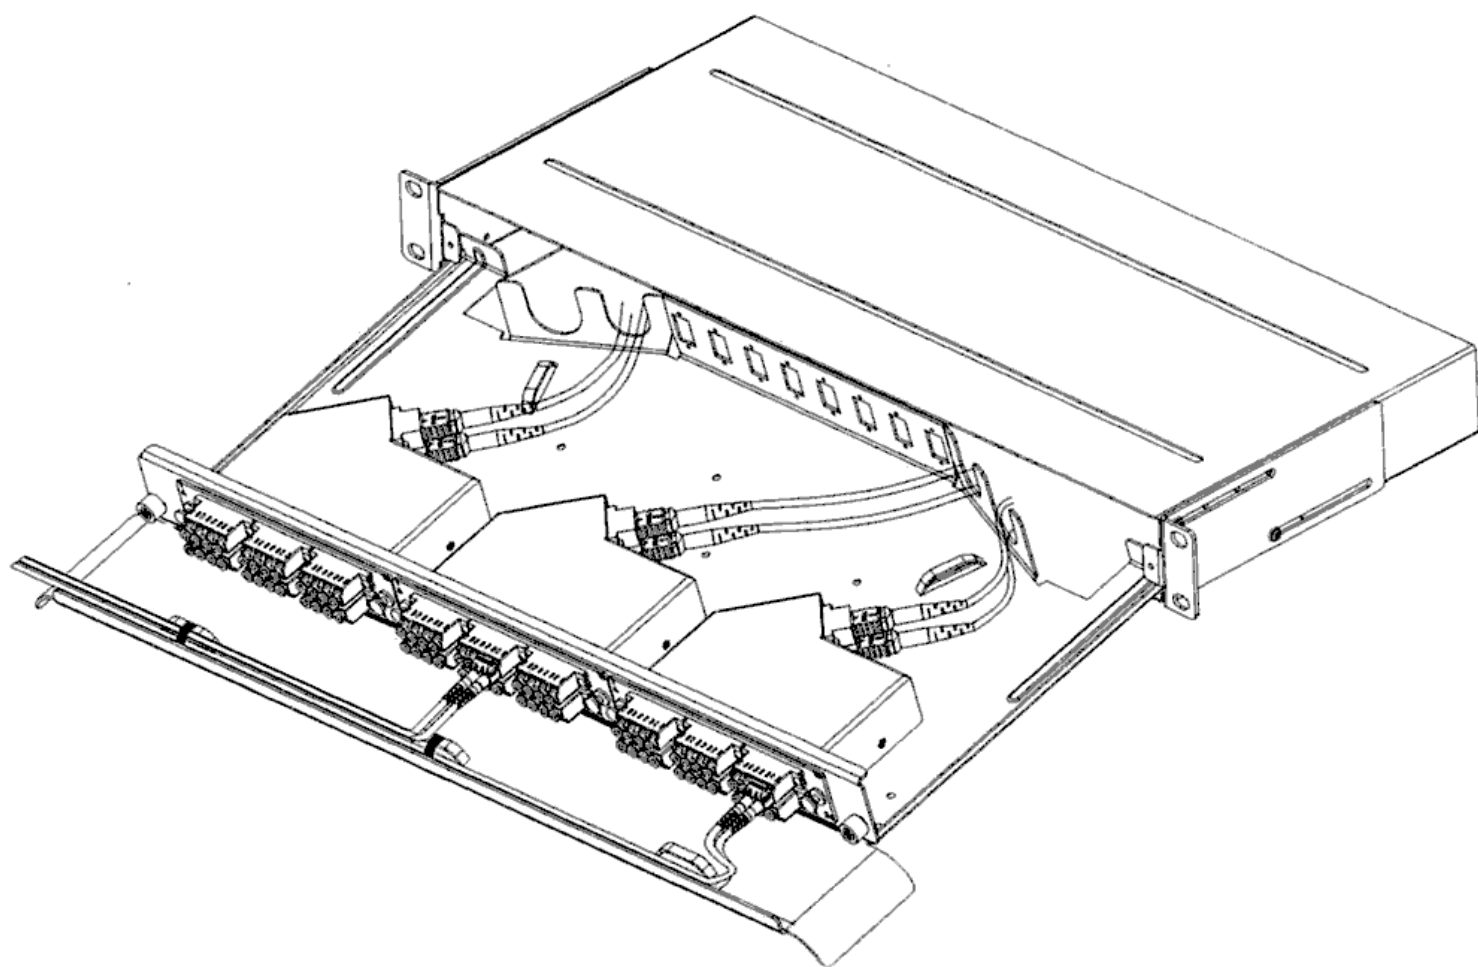

OM3 LC-LC
(A-B)



MPO Module
(12x LC-MPO male)




MPO Trunk Cable
(female-female)



MPO Coupler




MPO Fan-Out Cable
(MPO male-12x LC)

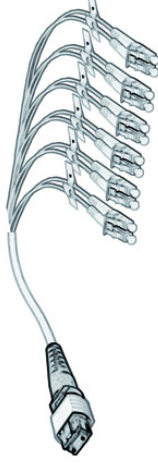

OM3 LC-LC
(A-B)




MPO Module
(12x LC-MPO male)



MPO Trunk Cable
(female-female)



MPO Module
(MPO male-12x LC)



OM3 LC-LC
(A-A)

