

AW-GET-180A-250 PoE Switch

Quick Installation Guide

INTRODUCTION

The AW-GET-180A is a 16 port 10/100/1000BaseT unmanaged PoE switch capable of feeding 15.4/30W (56V max. per port) power to Power over Ethernet (PoE) devices. It comes with an addition of 2 GbE SFP ports. The switch is capable of a total of 250 Watts power budget.

PACKAGE CONTENTS


* 1x PoE switch	* 1x Quick Installation Guide
* 2x rack mount ears	* 1x power cord (type by the shipped-to area)

↑ IMPORTANT:

- 1. Install the PoE switch in a ventilated and dry place that is free of electromagnetic source, vibration, moisture, and dust.
- 2. Make sure the ventilation openings on the switch are not blocked.
- 3. Use CAT5 or 6 UTP/STP cables.
- 4. AC input ($100\sim240\text{V/AC}$, $50\sim60\text{Hz}$), for a max. consumption of 250W.


CONNECTION

Front Panel



Rear Panel



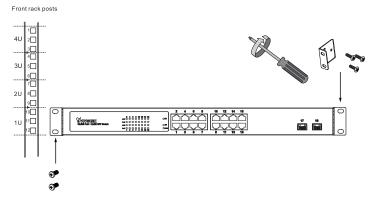

LED DEFINITIONS

LED DEFINITIONS		
POWER	ON	Power is on and normal.
	Off	Power is off.
LAN	Green ON	Connected in 1000Mbps.
	Yellow On	Connected in 10/100Mbps.
	Off	No connection.
	Flashing	Data is being transmitted or received.
PoE	Yellow ON	Port is linked to a powered device.
	OFF	No device is connected.

All specifications are subject to change without noice. Copyright @ 2016 VIVOTEK INC. All rights reserved.