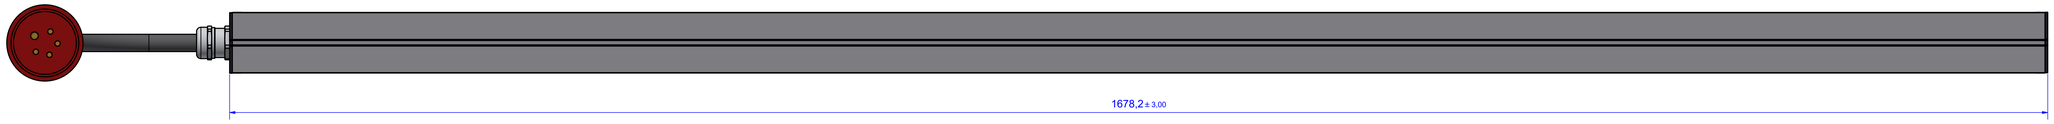

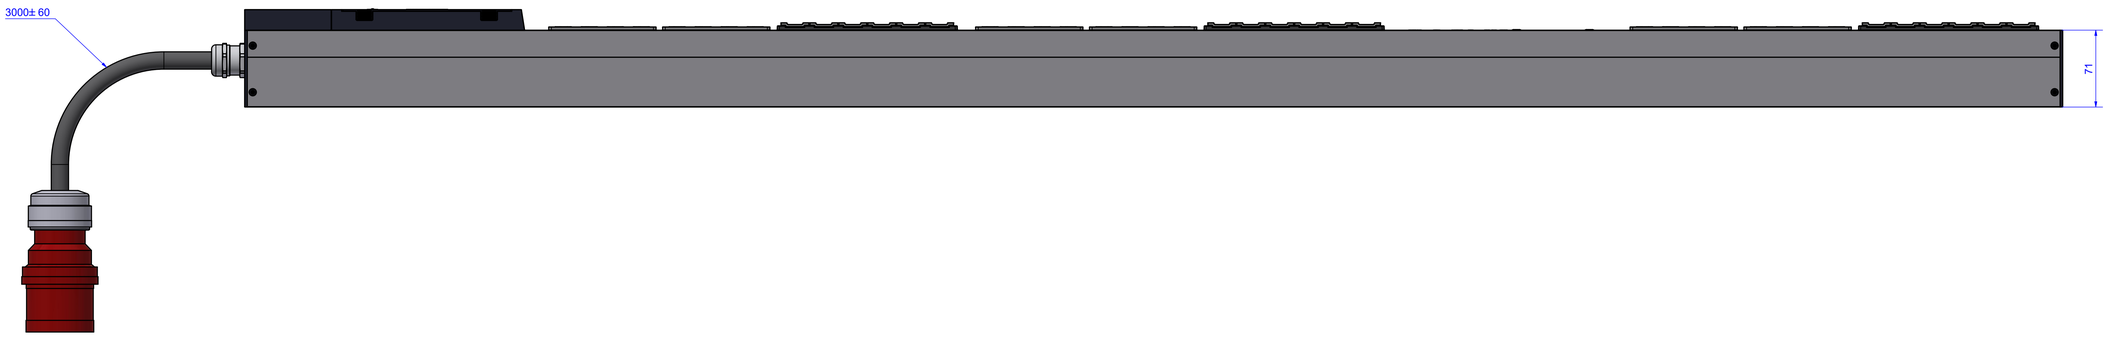

BN PRO Metered+
Metering per outlet
Input: 16 A / 400 V | 11 kW,
Supply cable: 3,0 m | 2,5 mm²,
with CEE plug 16 A red
Output:
24x C13 IEC Socket,
18x Combo C13/C15/C19/C21,
Integrated function for measuring current,
voltage, reactive, apparent and active power,
Reactive, apparent and active energy,
frequency and power factor
Hot-swappable controller and power supply unit
Integrated web server with web interface
1x Gbit/s (PoE) and 1x 10/100Mbit/s Ethernet connection
Interface for PDU network (up to 20 PDUs)
1x RJ45 interface for up to ten external sensors
1x USB-C port (USB 2.0)
2.4" TFT color display
Incl. frames for color coding (blue, red)
Incl. mounting brackets (L-shaped, for one PDU)

BN PRO Metered+
Messen pro Steckdose
Eingang: 16 A / 400 V | 11 kW,
Zuleitung: 3,0 m | 2,5 mm²,
mit CEE Stecker 16 A rot
Ausgang:
24x C13 Kaltgerätedosen,
18x Combo C13/C15/C19/C21,
Integrierte Funktion zur Messung von Strom,
Spannung, Blind-, Schein-, Wirkleistung,
Blind-, Schein-, Wirkenergie,
Frequenz und Leistungsfaktor
Im Betrieb tauschbarer Controller
und tauschbares Netzteil
Integrierter Webserver mit Webinterface
1x Gbit/s (PoE) und 1x 10/100Mbit/s Ethernetanschluss
Schnittstelle für PDU-Verbund (bis zu 20 PDUs)
1x RJ45 Schnittstelle für bis zu zehn externe Sensoren
1x USB-C Anschluss (USB 2.0)
2.4” TFT-Farbdisplay
Rahmen zur farblichen Kennzeichnung (blau, rot)
Inkl. Haltewinkel (L-Form, einfach)

				Werkstoff / Material:	Gewicht / Weight: 3 kg	Oberfläche / Surface:	
					Bezeichnung / Title: BM0024751		
				Datum	Name		
				Gezeichnet / Drawn: 17.03.2025	RD		
				Geprüft / Checked:			
				Freigegeben / Released:			
						Zeichg.Nr / Draw.-No:	
				BACHMANN	Art.Nr.:	Maßstab / Scale: 1 : 2	Format / Draw.-Size: A0	Blatt / Sheet: 1
Status / Status	Änderungen / Changes	Datum / Date	Name / Name				

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Geschmacksmustereintragung vorbehalten.
For reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.