


# DÄTWYLER Cat.5e (Class D) S/UTP patch cable, CU 5502 flex PVC, AMP v2, black, 0.5 m

**Product No.** 21.15.7030 **SECOMP®**

**Manufacturer** SECOMP

**Manufacturer No.** 21.15.7030

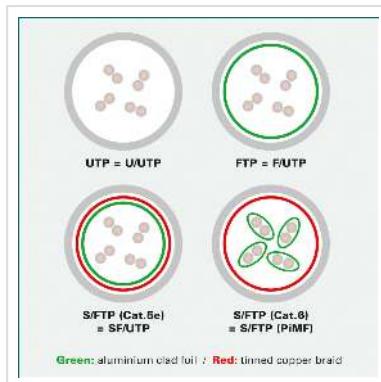

**Cat.5e**  
Class D

**S/UTP**

**DÄTWYLER data cable CU 5502 flex PVC, assembled on both sides with AMP v2 connectors for use in Fast Ethernet networks, Cat.5e. Flame-retardant.**

- Shielded DÄTWYLER cable assembled on both sides with AMP RJ-45 connector, 2nd generation (v2)
- Protective tab for locking pin
- Pin assignment: 8 wires 1 : 1
- Construction: Cable type S/UTP (braided shield)
- Impedance: 100 ohms
- Inner conductor: 8 wires AWG 26/7 tinned copper stranded wire
- Outer diameter 5.1 mm (approximate)
- Overall shielding: braided shield

**Construction:**

- Cable type: S/UTP braided shield
- Impedance: 100 ohms
- Inner conductor: 8 wires, AWG 26 copper stranded wire
- Outer diameter: 5.1 mm (approximate)
- Connector: AMP EMT
- Highly flexible PVC design

**Remark: Picture similar**

## Technical specifications

Manufacturer	SECOMP
Product group	Twisted Pair Cable
Product type	S/UTP patch cord
Colour	black
Length	0.5 m
Shield type	S/UTP
Transfer quality	Cat5e / Class D
Impedance	100 Ohm
Quantity of wires	8
Conductor cross section (AWG)	AWG 26
Conductor type	Stranded
Crossed	no
Bend radius	20 mm
Assignment	EIA/TIA 568A
Locking lever	yes
Colour (Spout)	transparent
External cable diameter	5.1 mm
Cable LSOH	no
Material (external cable mantle)	PVC
Side 1 Connector Type	RJ-45
Side 1 Connector Gender	Male
Side 2 Connector Type	RJ-45
Side 2 Connector Gender	Male
Connector Type RJ45	AMP v2
Height of packaging (single piece)	30 mm

Width of packaging  
(single piece) 180 mm

Depth of packaging  
(single piece) 250 mm

Package weight (single  
piece) 0.028 kg