


# ROLINE Cat. 8.1 (Class I) Keystone, RJ-45, shielded, slim, tool-free, silver

<b>Product No.</b>	26.11.0382
<b>Manufacturer</b>	ROLINE
<b>Manufacturer No.</b>	26.11.0382
<b>EAN (single piece)</b>	7630049640825

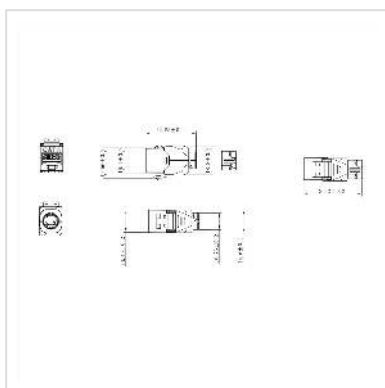

**This ROLINE Cat. 8.1 (Class I) Slim Shielded RJ-45 Keystone supports data transfer rates of up to 40 Gbps with a bandwidth of 2000 MHz and can easily be installed tool-free.**

- This ROLINE Cat. 8.1 (Class I) Keystone supports data transfer rates up to 10/25/40 Gbps with a bandwidth of 2000 MHz
- Tool-free: Connect the cable to the keystone without special tools - place the cable ends simply into the guides (with color coding), close and compress the module - the connection is ready for use
- The Keystone module can be "latched" into a 19" module support rack, which is optionally available in black (26.11.0360) or light gray (26.11.0359).
- Suitable for cables with outer diameter of 6.0 mm - 8.5 mm
- For solid and stranded cables with 22 AWG - 26 AWG
- Compliant with PoE per IEEE 802.3af, PoE+ per IEEE 802.3at and PoE++ per IEEE 802.3bt
- Wire coded scheme: EIA/TIA 568

## Technical specifications

Manufacturer	ROLINE
Product group	Connection technology TP
Product type	RJ45 Keystone Jack
Colour	silver

Scope of delivery	Keystone
Shield type	Screened
Transfer quality	Cat8.1 / Class I
Quantity of ports	1
Assignment	EIA/TIA 568A & 568B
Material (casing)	Zinc alloy
Connection direction	Straight
Dimensions (HxWxD)	18.8 x 14.6 x 36.2 mm
Operating temperature min.	0 °C
Operating temperature max.	70 °C
Storage temperature min.	-40 °C
Storage temperature max.	85 °C
Height	18.8 mm
Width	14.6 mm
Depth	36.2 mm
Weight	18 g
Height of packaging (single piece)	20 mm
Width of packaging (single piece)	20 mm
Depth of packaging (single piece)	20 mm
Package weight (single piece)	0.01 kg