
ROLINE Keystone Jack, Cat.6A (Class EA), RJ-45, UTP, tool-free, SLIM and SHORT, white

Product No. Manufacturer Manufacturer No. EAN (single piece)

26.11.0392 ROLINE 26.11.0392 7630049635036





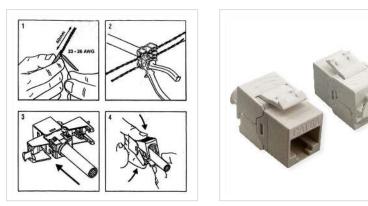

ROLINE Cat. 6A Keystone for use in a 10 Gigabit network, using a bandwith of 500 MHz, unshielded, with a very small form factor!

• The cables are connected to the Keystone without tools - the cable cores are simply placed in the guides, the module is closed and pressed together - the connection is complete

• Keystone with printed color coding in accordance with EIA / TIA 568

• The ROLINE Cat.6/Class E 19" keystones meet the transmission properties of a Cat.6A/Class EA link

- Unshielded
- Slim and short
- Color: white

• The Keystone modules can be clipped into a 19" module support (26.11.0357 in black or 26.11.0356 in light gray) with an earthing connection. Or they can be used together with a module holder 25.16.8579 to form a junction box.

| Technical specifications | | |
|--------------------------|--------------------------|--|
| Manufacturer | ROLINE | |
| Product group | Connection technology TP | |
| Product type | RJ45 Keystone Jack | |
| Colour | white | |
| Scope of delivery | Keystone, Cable Tie | |

| Shield type | Not screened |
|---------------------------------------|---------------------|
| Transfer quality | Cat6A / Class EA |
| Quantity of ports | 1 |
| Assignment | EIA/TIA 568A & 568B |
| Connection direction | Straight |
| Operating temperature min. | -10 °C |
| Operating temperature max. | 60 °C |
| Storage temperature min. | -40 °C |
| Storage temperature max. | 70 °C |
| Height | 21 mm |
| Width | 15 mm |
| Depth | 30 mm |
| Weight | 6 g |
| Height of packaging (single piece) | 20 mm |
| Width of packaging (single piece) | 20 mm |
| Depth of packaging (single piece) | 20 mm |
| Package weight (single piece) | 0.005 kg |
| | |